

Model	X26-12P	X26-14P	X26-17P	X26-20P	X26-22P	X26-27P	X26-32P	X26-38P	X26-41PT
Advised pool volume (m³)	18-35	30-50	35-60	40-65	45-75	55-90	65-105	65-105	75-120
Operating air temperature (°C)	-20~43								
Performance Condition: Air 26°C, Water 26°C, Humidity 80%									
Heating capacity (kW) in Turbo mode	10.0	14.2	17.0	20.0	22.5	27.0	32.5	32.5	41.0
Heating capacity (kW) in Smart mode	8.0	9.0	11.7	13.9	15.5	17.6	22.5	27.1	34.3
COP	21.6~7.6	30~7.9	21.9~7.6	22~7.3	23.0~7.3	26.2~7.4	21.1~7.4	20.6~7.2	21.1~7.2
COP at 50% capacity	14.4	16.0	15.0	14.8	14.9	15.8	15.2	15.0	14.8
Performance Condition: Air 15°C, Water 26°C, Humidity 70%									
Heating capacity (kW) in Turbo mode	6.6	8.5	9.1	11.2	13.7	15.7	18.2	22.1	28.2
Heating capacity (kW) in Smart mode	5.3	6.4	7.5	9.2	10.6	12.3	15.0	18.4	23.5
COP	7.9~5.4	11.0~5.6	8~5.2	8.8~5.2	8.4~5.1	9.2~5.3	8.1~5.5	8.0~5.4	8.1~4.9
COP at 50% capacity	7.2	8.0	7.3	7.5	7.3	7.8	7.3	7.4	7.4
Performance Condition: Air 7°C, Water 26°C, Humidity 90%									
Heating capacity (kW) in Turbo mode	5.1	6.8	7.4	9.5	11.5	12.5	15.6	18.1	22.5
COP	6.8~4.5	7.3~4.9	7~4.4	7.1~4.4	7.0~4.2	7.2~4.3	6.8~4.5	7.2~4.4	6.7~4.3
Sound pressure at 1m (dB(A))	36.9~43.9	38.1~45.4	38.1~46.3	41.3~47.2	41.9~47.9	42.2~49.9	41.1~50.3	42.5~50.9	41.8~51.9
Sound pressure of 50% capacity at 1m (dB(A))	37.9	39.1	40.6	43	42.8	43.6	44.4	45.5	45.8
Sound pressure at 10m (dB(A))	16.9~23.9	18.1~25.4	18.1~26.3	21.3~27.2	21.9~27.9	22.2~29.9	21.1~30.3	22.5~30.9	21.8~31.9
Compressor	Twelve-story DC-inverter								
Heat exchanger	Lightning heat exchanger								
Casing	Aluminum alloy Casing								
Power supply	230V~1PH/50Hz			400V 3N~, 50Hz			250V~1PH/50Hz		
Rated input power at air 15°C (kW)	0.15~1.22	0.12~1.52	0.19~1.75	0.21~2.16	0.25~2.68	0.27~2.96	0.37~3.51	0.44~4.18	0.58~5.76
Rated input current at air 15°C (A)	0.57~5.3	0.52~4.61	0.83~7.61	0.91~9.39	1.09~11.65	1.17~12.87	1.61~14.39	1.91~18.17	0.84~8.31
Advised water flow (m³/h)	2~4	2~4	3~4	4~6	4~6	6.5~8.5	8~10	8~10	10~12
Water pipe inlet size (mm)	50								
Net Dimension L×W×H (mm)	923×427×661 1120×427×661 1112×427×760 1160×427×760 11148×536×955 1146×536×955 1146×536×955 1315×536×1060 1397×536×1249								
Net weight (kg)	67	74	75	85	86	110	113	145	186
Qty per 20'FT / 40'HQ (sets)	79168	79168	63758	42158	42155	3472	3472	1464	1250

* The advised pool volume indicated applies under following conditions: Swimming pool is well covered, system runs at least 15 hours per day.

* The final specs will be accordance with the specs on the product.




Fairland Group Limited
Room 2315-2317, No.69, Xianle Road Central Guangzhou,
P.R.China 510095

Tel: 0086-20-87322418
Fax: 0086-20-87322767
E-mail: sales@fairland.com.cn
Web: www.fairland.com.cn



TurboSilence 26

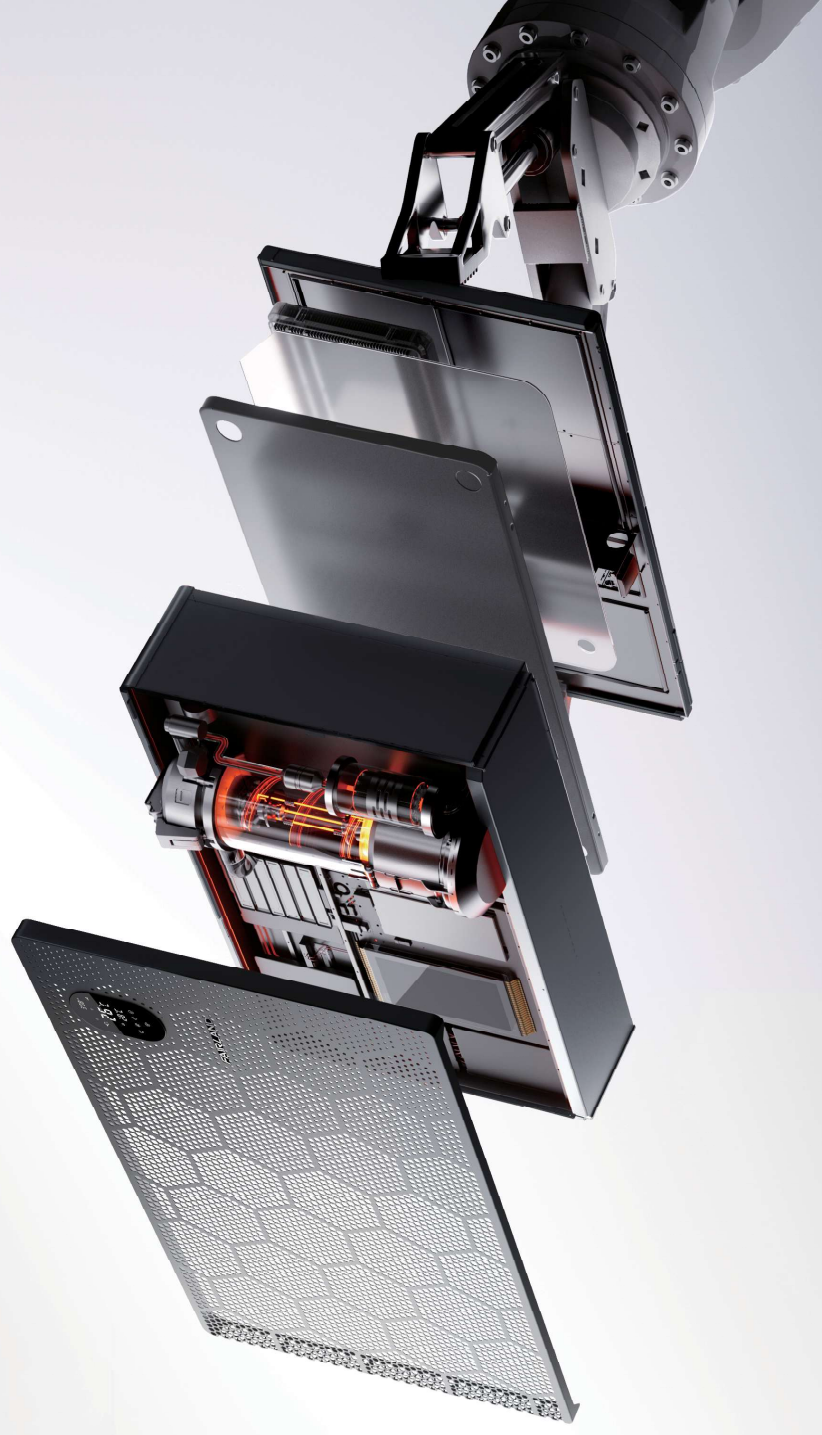

HIGHEST COP30



A new era of energy-saving heat pumps, up to 30 times energy saving

130% TURBOSILENCE



Heating efficiency perfectly increased with maximum running speed

GWP 0.02 ONLY



R290 Driven, Real Low Carbon